



Induced Radioactivity

Beginners' FLUKA Course

FLUKA-Implementation – *History - 1*

1995 – Offline evolution:

An offline code (usrusuwev.f) is distributed together with FLUKA, which allows the offline computation of the time evolution of a radionuclide inventory obtained with RESNUCLE for arbitrary irradiation profiles and decay times.

2002 – Two step method:

The offline code has been adapted for online use, each time a residual nucleus is produced during a particle cascade. This allows storing information on radionuclides for certain irradiation parameters and cooling times into an external file. This information can then be read in order to **compute residual dose rates due to induced radioactivity (two-step method)**. Results were benchmarked in numerous irradiation experiments.

2004 - Online:

This capability has been implemented into FLUKA with an **exact analytical solution of the Bateman equations** describing activity build-up and decay during irradiation and cooling down, for arbitrary irradiation conditions.

FLUKA-Implementation – *History* - 2

The generation and transport of decay radiation (limited to γ , β^- , β^+ , X-rays, and Conversion Electrons emissions for the time being) is now possible during the same simulation which produces the radio-nuclides (**one-step method**). A dedicated database of decay emissions has been written, using mostly information obtained from NNDC, sometimes supplemented with other data and checked for consistency.

As a consequence, results for production of residuals, their time evolution and residual doses due to their decays can now be obtained in the same run, for an arbitrary number of decay times and for a given irradiation profile.

FLUKA-Implementation – *Main features*

- up to 4 different decay branching for each isotope/isomer
- all gamma lines down to 0.1-0.01% branching, including X-ray lines following conversion electron emissions
- all beta emission spectra down to 0.1-0.01% branching: the sampling of the beta+/- spectra including screening Coulomb corrections
- Auger and conversion electrons
- **Isomers:** the present models do not distinguish among ground state and isomeric states (it would require spin/parity dependent calculations in evaporation). A rough estimate (**equal sharing among states**) of isomer production can be activated in the RADDECAY option.
- **Different transport thresholds can be set for the prompt and decay radiation parts**, as well as some (limited) biasing differentiation (see later)

Input options

Input options - *Overview*

Input card: **RADDECAY**


requests simulation of decay of produced radioactive nuclides and allows to modify biasing and transport thresholds (defined with other cards) for the transport of decay radiation

Input card: **IRRPROFI**

definition of an irradiation profile (irradiation times and intensities)

Input card: **DCYTIMES**

definition of decay (cooling) times

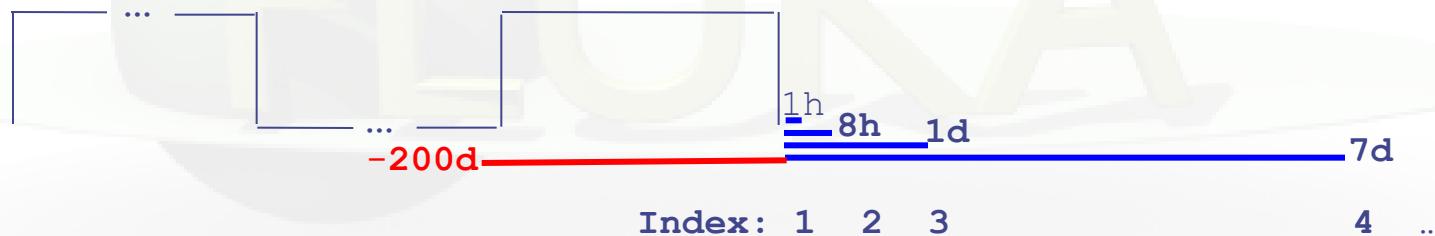

Input card: **DCYSCORE**

associates scoring detectors (radio-nuclides, fluence, dose) with different cooling times

Input card: **AUXSCORE**

allows to associate scoring estimators with dose equivalent conversion factors or/and to filter them according to (generalized) particle identity

Input options - Overview

```
* 1) request radioactive decays
RADDECAY          1.0                  3.0          0000099999
*
* 2) definition of irradiation pattern
*           180days   part/s    185days      180days   part/s
IRRPROFI  1.5552E7  5.9175E5  1.5984E7  0.0  1.5552E7  5.9175E5
*
* 3) definition of cooling times
*           1hour     8hours     1day       7days     1month    4months
DCYTIMES   3600.    28800.    8.64E4   6.048E5  2.592E6  1.0368E7
*
* 4) associate scoring with different cooling times
DCYSCORE      1.0                  1.0          1.0          USRBIN
USRBIN        10.0     201.      -70.0      150.0      200.0      5000.0fluence1
USRBIN      -250.0    -200.      0.0       80.0       80.0      1.0&
DCYSCORE      2.0                  2.0          2.0          USRBIN
USRBIN        10.0     201.      -71.0      150.0      200.0      5000.0fluence2
USRBIN      -250.0    -200.      0.0       80.0       80.0      1.0&
RESNUCLE      3.0      -26.          FLOOR      TUN_FLOO
RESNUCLE      3.0      -27.          WALL      TUN_WALL
DCYSCORE      1.0          RESTUBE1  RESTUBE1  RESNUCLE
RESNUCLE      3.0      -75.          TUBE      RESTUBE1
```

Input options - *Overview*

- request radioactive decays

RADDECAY	Decays:	Active ▼	Patch Isom:	▼	Replicas:	3.0	
h/μ Int:	ignore ▼	h/μ LPB:	ignore ▼	h/μ WW:	ignore ▼	e-e+ Int:	ignore ▼
e-e+ LPB:	ignore ▼	e-e+ WW:	ignore ▼	Low-n Bias:	ignore ▼	Low-n WW:	ignore ▼
		decay cut:	0.0	prompt cut:	99999.0	Coulomb corr:	▼

- definition of irradiation pattern

IRRPROFI	180days part/s	185days	180days part/s	p/s:	5.9175E5
		Δt: 1.5552E7		p/s:	0.0
		Δt: 1.5984E7		p/s:	5.9175E5
		Δt: 1.5552E7			

- definition of cooling times

DCYTIMES	1hour	8hours	1day	7days	1month	4months	t1:	3600.	t2:	28800.	t3:	8.64E4
							t4:	6.048E5	t5:	2.592E6	t6:	1.0368E7

Input options - *Overview*

Associate scoring with different cooling times

4) associate scoring with different cooling times

DCYSCORE	Cooling t: 3600. ▼ Det: Shielding ▼	to Det: ▼	Kind: USRBIN ▼ Step:
USRBIN	Type: X-Y-Z ▼ Part: ALL-PART ▼	Unit: 70 BIN ▼ Xmin: -250.0 Ymin: -200. Zmin: 0.0	Name: Shielding NX: 80.0 NY: 80.0 NZ: 1.0
DCYSCORE	Cooling t: 28800. ▼ Det: Target ▼	to Det: Target ▼	Kind: USRBIN ▼ Step:
AUXSCORE	Type: USRBIN ▼ Z: 0 Det: Target ▼	Part: ▼ A: 0 to Det: ▼	Set: EWT74 ▼ Isomer: 0 Step:
USRBIN	Type: X-Y-Z ▼ Part: DOSE-EQ ▼	Unit: 71 BIN ▼ Xmin: -250.0 Ymin: -200. Zmin: 0.0	Name: Target NX: 80.0 NY: 80.0 NZ: 1.0
RESNUCLE	Type: All ▼ Max Z: Max M:	Unit: 26 BIN ▼ Reg: FLOOR ▼	Name: TUN_FLOO Vol:
RESNUCLE	Type: All ▼ Max Z: Max M:	Unit: 27 BIN ▼ Reg: WALL ▼	Name: TUN_WALL Vol:
DCYSCORE	Cooling t: 3600. ▼ Det: RESTUBE1 ▼	to Det: RESTUBE1 ▼	Kind: RESNUCLE ▼ Step:
RESNUCLE	Type: All ▼ Max Z: Max M:	Unit: 75 BIN ▼ Reg: TUBE ▼	Name: RESTUBE1 Vol:

Particle Types

Name	Number	Units	Description
DOSE	228	GeV/g	Dose (energy deposited per unit mass)
ACTIVITY	234	Bq/cm ³	Activity per unit volume
ACTOMASS	235	Bq/g	Activity per unit mass
SI1MEVNE	236		Silicon 1 MeV-neutron equivalent flux
HADGT20M	237		Hadrons with energy > 20 MeV
DOSE-EQ	240	pSv	Dose Equivalent (AUXSCORE)

Card: RADDECAY [1/2]

* 1) request radioactive decays

RADDECAY

1.0

0

3.0

0000099999

0

RADDECAY

h/ μ Int: ignore ▼

Decays: Active ▼

Patch Isom: ▼

Replicas: 3.0

e-e+ LPB: ignore ▼

h/ μ LPB: ignore ▼

h/ μ WW: ignore ▼

e-e+ Int: ignore ▼

e-e+ WW: ignore ▼

Low-n Bias: ignore ▼

Low-n WW: ignore ▼

decay cut: 0.0

prompt cut: 99999.0

Coulomb corr: ▼

WHAT(1)

Decays:

= 1

Active

radioactive decays activated for requested cooling times

"activation study case": time evolution calculated analytically for fixed (cooling) times. Daughter nuclei as well as associated radiation is considered at these (fixed) times

> 1

Semi-Analogue

radioactive decays activated in semi-analogue mode

each radioactive nucleus is treated like all other unstable particles (random decay time, daughters and radiation), all secondary particles/nuclei carry time stamp ("age")

WHAT(2)

Patch Isom:

> 0

On

isomer "production" activated

WHAT(3)

Replicas:

#

number of "replicas" of the decay of each individual nucleus

Card: RADDECAY [2/2]

RADDECAY

h/ μ Int: ignore ▾
e-e+ LPB: ignore ▾

Decays: Active ▾

h/ μ LPB: ignore ▾

e-e+ WW: ignore ▾

decay cut: 0.0

Patch Isom: ▾

h/ μ WW: ignore ▾

Low-n Bias: ignore ▾

prompt cut: 99999.0

Replicas: 3.0

e-e+ Int: ignore ▾

Low-n WW: ignore ▾

Coulomb corr: ▾

WHAT(4)

h/m Int .. Low-n WW

switch for applying various biasing features only to prompt radiation or only to particles from radioactive decays

9 digits, each responsible for a different biasing

Example:

5th digit, e+/e-/gamma leading particle biasing applied
000010000 to prompt radiation only
000020000 to decay radiation only
000030000 to both

Default: 111111111 (or blank as above)

WHAT(5)

decay cut: #

prompt cut: #

multiplication factors to be applied to transport cutoffs

10 digits, first five for decay radiation, second five for prompt radiation (see manual)

Special cases:

000009999 kill EM cascade for prompt radiation

9999900000 kill EM cascade for residual radiation

Card: IRRPROFI

```
* 2) definition of irradiation pattern
*
IRRPROFI 180days part/s 185days
           1.5552E7 5.9175E5 1.5984E7
           180days part/s
           0.0 1.5552E7 5.9175E5
```

```
IRRPROFI 180days part/s 185days
          Δt: 1.5552E7 p/s: 5.9175E5
          Δt: 1.5984E7 p/s: 0.0
          Δt: 1.5552E7 p/s: 5.9175E5
```

WHAT(1,3,5)

Δt: #

irradiation time (second)

WHAT(2,4,6)

p/s #

beam intensity (particles per second)

Note: zero intensity is accepted and can be used
e.g., to define beam-off periods

Note: Several cards can be combined up to a maximum of 2500 irradiation intervals.

Example (see above):

180 days	185 days	180 days
5.9×10^5 p/s	0 p/s	5.9×10^5 p/s
(beam-off)		

Card: DCYTIMES

* 3) definition of cooling times

*	1hour	8hours	1day	7days	1month	4months
DCYTIMES	3600.	28800.	8.64E4	6.048E5	2.592E6	1.0368E7

1hour	8hours	1day	7days	1month	4months		
DCYTIMES			t1: 3600.		t2: 28800.	t3: 8.64E4	
			t4: 6.048E5		t5: 2.592E6	t6: 1.0368E7	

WHAT(1) – WHAT(6) cooling time (in seconds) after the end of the irradiation


t1 .. t6

Note: Several cards can be defined.

Each cooling time is assigned an index, following the order in which it has been input. This index can be used in option DCYSCORE to assign that particular cooling time to one or more scoring detectors. A negative decay time is admitted: scoring is performed at the chosen time "during irradiation"

Example (see above):

180 days	185 days	180 days
5.9×10^5 p/s	0 p/s	5.9×10^5 p/s



1h 8h 1d
etc.

7d

Card: DCYSCORE [1/2]

* Associate scoring with different cooling times							
DCYSCORE	1.0			Target			USRBIN
USRBIN	10.0	201.	-70.0	150.0	200.0	5000.0	Target
USRBIN	-250.0	-200.	0.0	80.0	80.0		1.0 &
DCYSCORE	Cooling t: 3600. ▼ Det: Shielding ▼ to Det: ▼				Kind:	USRBIN ▼	
USRBIN	Type: X-Y-Z ▼	Xmin: -250.0		Unit: 70 BIN ▼	Name:	Shielding	
	Part: ALL-PART ▼	Ymin: -200.		Xmax: 150.0	NX:	80.0	
				Ymax: 200.0	NY:	80.0	

WHAT(1)

Cooling: #

Cooling time index to be associated with the detectors

Drop down list of available cooling times

WHAT(4)..WHAT(5)

Det .. to Det

Detector index/name of kind (SDUM/Kind)

Drop down list of available detectors of kind (Kind)

WHAT(6)

Step #

step lengths in assigning indices

SDUM

Kind

Type of estimator

RESNUCLE, USRBIN/EVENTBIN, USRBDX, USRTRACK...

Units: All quantities are expressed per unit time. For example

RESNUCLE Bq

USRBIN fluence rate / dose rate

Card: DCYSCORE [2/2]

In the semi-analogue decay mode, estimators can include the decay contribution (on top of the prompt one) through association by DCYSCORE with a cooling time index ≤ -1.0



Card: AUXSCORE

* associate scoring with dose equivalent conversion factors
AUXSCORE USRBIN PHOTON Target EWT74

AUXSCORE Type: USRBIN ▼ Part: PHOTON ▼ Set: EWT74 ▼
 Det: Target ▼ to Det: ▼ Step:

WHAT(1)

Type:

Type of estimator to associate with

drop down list of estimator types (USRBIN, USRBDX...)

WHAT(2)

Part:

#

particle or isotope to filter scoring

Particle or particle family list. If empty then flair will prompt for Z, A, and State for filtering on specific isotopes

WHAT(4,5)

Det .. to Det

Detector range

Drop down list to select detector range of type WHAT(1)

WHAT(6)

Step:

#

Step in assigning indices of detector range

SDUM


Set:

Conversion set for dose equivalent (DOSE-EQ) scoring

Drop down list of available dose conversion sets

Conversion Coefficients


Conversion coefficients from fluence to ambient dose equivalent are based on ICRP74 values and values calculated by M.Pelliccioni. They are implemented for **protons, neutrons, charged pions, muons, photons, electrons** (conversion coefficients for other particles are approximated by these). AMB74 is the default choice for dose equivalent calculation.

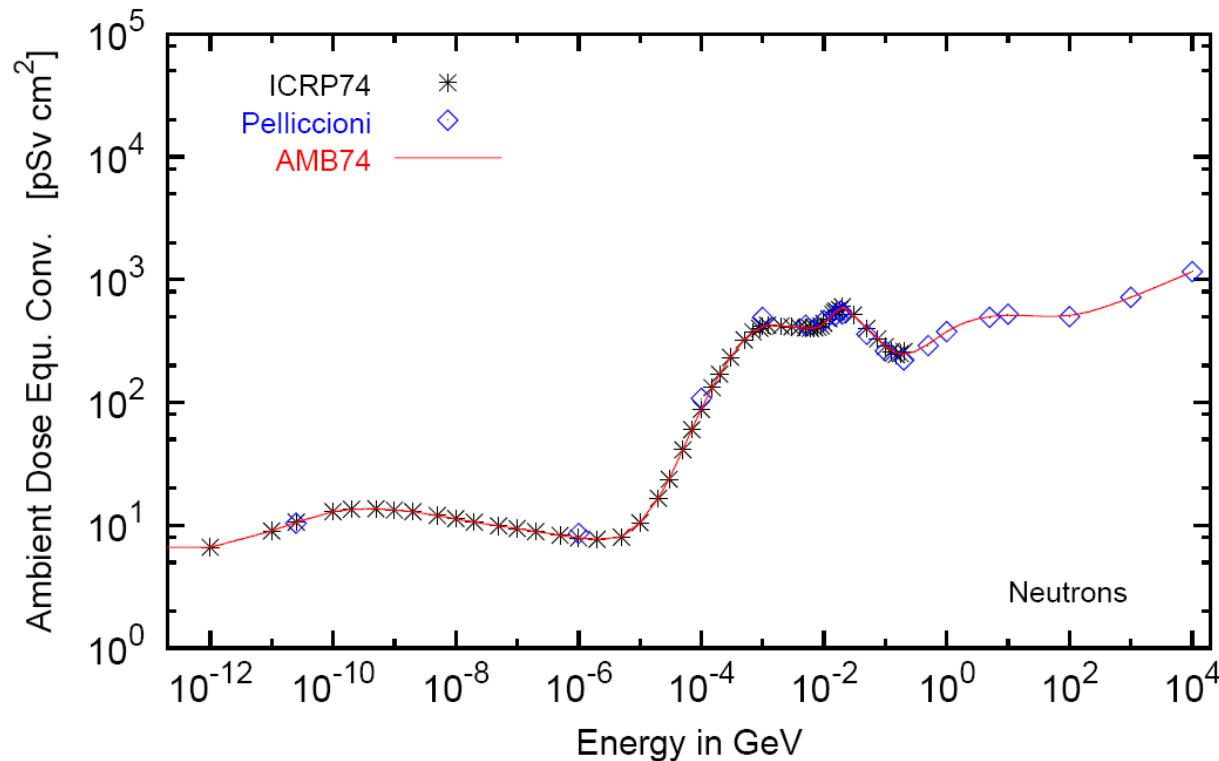

Fluence to effective dose coefficients

- Conversion coefficients from fluence to effective dose are implemented for three different irradiation geometries:
 - ◆ anterior-posterior
 - ◆ rotational
 - ◆ WORST ("Working Out Radiation Shielding Thicknesses") is the maximum coefficient of anterior-posterior, posterior-anterior, right-lateral and left-lateral geometries. It is recommended to be used for shielding design.
- Implemented for radiation weighting factors recommended by ICRP60 (e.g., SDUM=ETW74) and recommended by M.Pelliccioni (e.g., SDUM=EWTMP). The latter anticipate the 2007 recommendations of ICRP.
- Implemented for protons, neutrons, charged pions, muons, photons, electrons (conversion coefficients for other particles are approximated by these)
- Zero coefficient is applied to all heavy ions

Fluence to effective dose coefficients

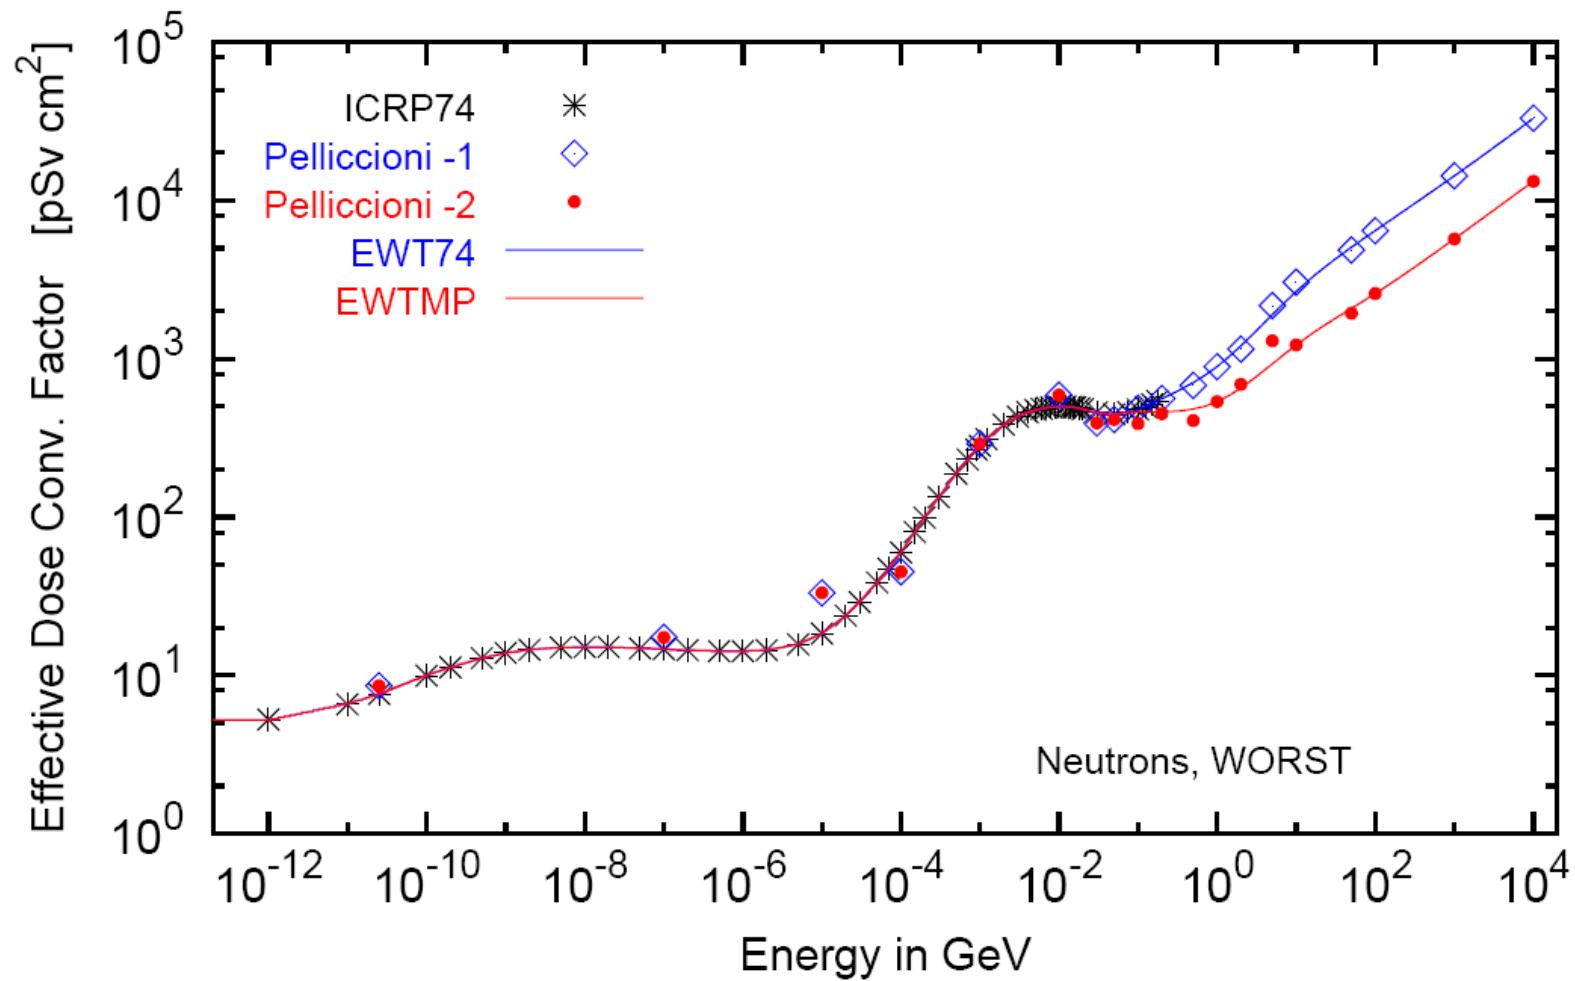

Card: RESNUCLEi [1/3]

RESNUCLE	3.0	-26.	0	0	FLOOR	TUN_FLOO
RESNUCLE Max Z:	Type: All ▾ Max M:	Unit: 26 BIN ▾ Reg: FLOOR ▾	Name: TUN_FLOO Vol:			

Scoring of residual nuclei or activity on a region basis

WHAT(1)

Type:

- 1.0 spallation products (except from low-energy neutron interactions)
- 2.0 products from low-energy neutron interactions (provided the information is available)
- 3.0 all residual nuclei are scored (if available, see above)
- <= 0.0 resets the default (= 1.0)

WHAT(2)

Unit:

WHAT(3)

Max Z:

Maximum atomic number Z of the residual nuclei distribution

Default: according to the Z of the element(s) of the material assigned to the scoring region

WHAT(4)

Max M:

Maximum M = N - Z - NMZ_min

of the residual nuclei distribution (NMZ_min = -5)

Default: maximum value according to the A, Z of the element(s) of the material assigned to the scoring region.

Card: RESNUCLEi [2/3]

RESNUCLE Max Z:	Type: All ▼ Max M:	Unit: 26 BIN ▼ Reg: FLOOR ▼	Name: TUN_FLOO Vol:
---------------------------	-----------------------	--------------------------------	------------------------

WHAT(5) scoring region number/name
Floor:
(Default 1.0)

WHAT(6) volume of the region in cm³
Vol:
(Default = 1.0)

SDUM character string identifying the detector
Name:
(max. 10 characters)

Notes:

1. In the case of **heavy ion** projectiles the default NMZ, based on the region material, is not necessarily sufficient to score all the residual nuclei, which could include possible ion fragments.
2. Residual nuclei from low-energy neutron interactions are only scored if that information is available in the **low-energy neutron data set** (see Manual)
3. Starting with Fluka2006.3 **protons** are scored, together with **²H**, **³H**, **³He**, **⁴He**, at the end of their path. This is a change with respect to previous versions where protons were not scored.

Card: RESNUCLEi [3/3]

**** Isotope Yield as a function of Mass Number ****
**** (nuclei / cmc / pr) ****

A_min: 1 - A_max: 198

A: 186 1.5870372E-08 +/- 9.9000000E+01 %
A: 185 3.7605012E-09 +/- 9.9000000E+01 %
A: 184 1.4581326E-08 +/- 9.9000000E+01 %
A: 183 1.0712972E-08 +/- 9.9000000E+01 %
A: 182 7.4882118E-09 +/- 9.9000000E+01 %

...

**** Isotope Yield as a function of Atomic Number ****
**** (nuclei / cmc / pr) ****

Z_min: 1 - Z_max: 78

Z: 74 5.2413383E-08 +/- 9.9000000E+01 %
Z: 42 3.0072785E-07 +/- 9.9000000E+01 %
Z: 41 4.7906228E-08 +/- 9.9000000E+01 %
Z: 40 3.7605012E-09 +/- 9.9000000E+01 %
Z: 38 3.7605012E-09 +/- 9.9000000E+01 %

...

**** Residual nuclei distribution ****
**** (nuclei / cmc / pr) ****

A \ Z	68	69	70	71	72	73	74	75	76	77	78
186	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.59E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 99.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %
185	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	3.76E-09	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 99.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %
184	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.46E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 99.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %
183	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	0.00E+00	1.07E-08	0.00E+00	0.00E+00	0.00E+00	0.00E+00
	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 99.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %	+/- 0.0 %

...

Card: PHYSICS

Please activate the following two cards if residuals are of interest:

switch to activate the evaporation of heavy fragments (up to A=24)

PHYSICS	3.0	EVAPORAT
PHYSICS	1.0	COALESCE

special options for coalescence treatment

ISOTOPE 'beam'

to simulate a radioactive source:






→ request decay by the RADDECAY card

Benchmarks

Benchmark experiment

Irradiation of samples of different materials to the stray radiation field created by the interaction of a 120 GeV positively charged hadron beam in a copper target

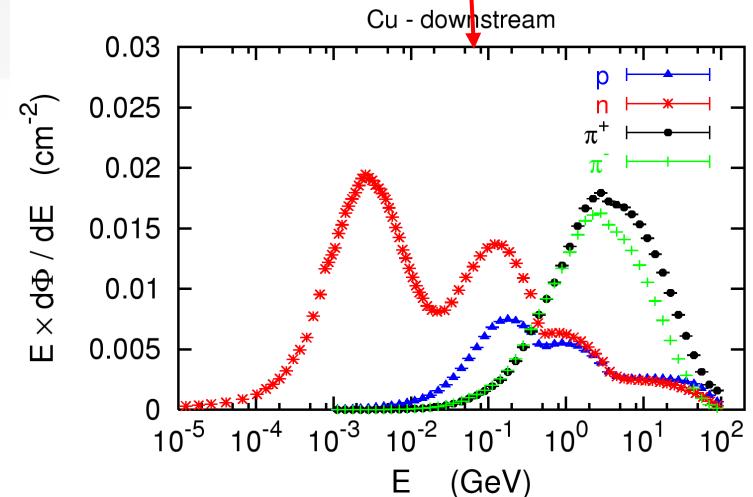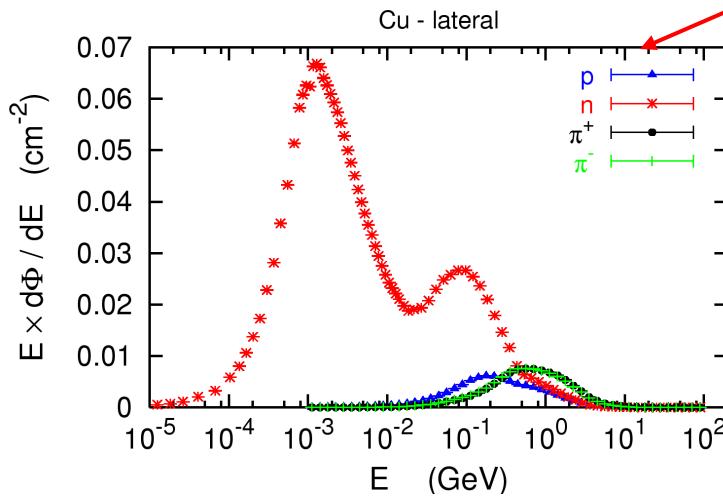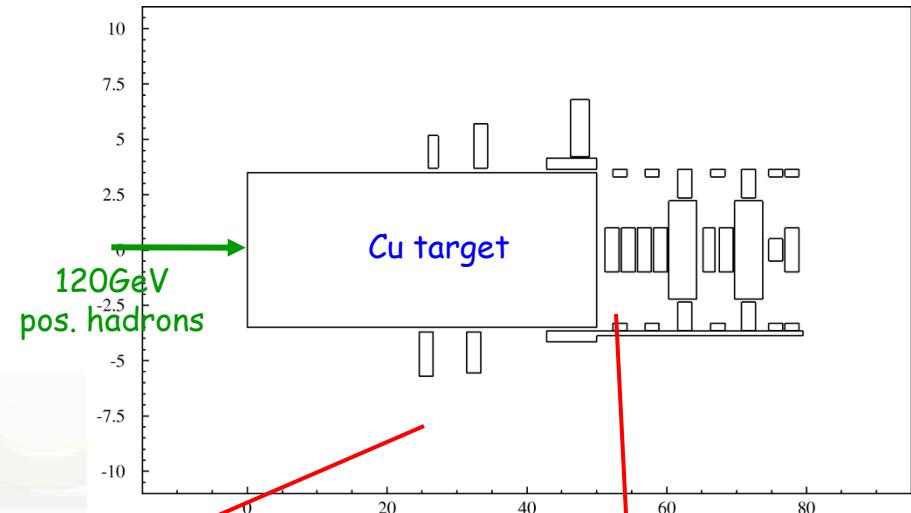

Benchmark Experiment

Measurement and calculation of

1. Specific activities
2. Residual dose equivalent rates

for different cooling times

Benchmark experiment – *Instrumentation 1*

Low-background coaxial High Precision Germanium detector (Canberra)

- use of [two different detectors](#) (90 cm³ sensitive volume, 60% and 40% relative efficiency)

Genie-2000 (Ver. 2.0/2.1) spectroscopy software by Canberra and PROcount-2000 counting procedure software

- include a set of [advanced spectrum analysis algorithms](#), e.g., nuclide identification, interference correction, weighted mean activity, background subtraction and efficiency correction
- comprise well-developed methods for peak identification using standard or user-generated nuclide libraries. [HERE: use of user-generated nuclide libraries](#), based on nuclides expected from the simulation and material composition

Efficiency calibration with LABSOCS

- allows the creation of a corrected efficiency calibration by modelling the sample taking into account [self-absorption inside the sample and the correct detector geometry](#)

Reference: M. Brugger, S. Roesler, et al., Nuclear Instruments and Methods A 562 (2006) 814-818

Benchmark experiment – *Instrumentation 2*

Portable spectrometer Microspec

- NaI detector, cylindrical shape, 5 x 5 cm
- folds spectrum with detector response (“calibrated” with ^{22}Na source)
- physical centre of detector determined with additional measurements with known sources (^{60}Co , ^{137}Cs , ^{22}Na) to be 2.4 cm



Reference: M. Brugger *et al.*, Radiat. Prot. Dosim. 116 (2005) 12-15

Isotope	Copper	Iron	Titanium	Stainless Steel	Aluminum	Concrete
⁷ Be 53.29d	1.47 ± 0.19	M	1.65 ± 0.22	1.50 ± 0.19	0.98 ± 0.24	M, C,N
	0.84 ± 0.25		0.90 ± 0.15			
²² Na 2.60y	0.72 ± 0.11		0.70 ± 0.13	M	0.85 ± 0.11	
²⁴ Na 14.96h	0.42 ± 0.03		0.48 ± 0.02		0.63 ± 0.02	
²⁷ Mg 9.46m				0.79 ± 0.14	M	
²⁸ Mg 20.91h	0.25 ± 0.04	-	0.23 ± 0.03	-	0.31 ± 0.02	-
²⁸ Al 2.24m	0.25 ± 0.03	-	0.21 ± 0.02	-	0.31 ± 0.02	-
²⁹ Al 6.56m				0.93 ± 0.25	M	
³⁸ S 2.84h				0.60 ± 0.12	-	
^{m34} Cl 32.00m				0.91 ± 0.19	M	1.19 ± 0.16
³⁸ Cl 37.24m				0.61 ± 0.08		0.60 ± 0.01
³⁹ Cl 55.60m				0.64 ± 0.11	M	0.73 ± 0.08
⁴¹ Ar 1.82h	0.39 ± 0.06		0.46 ± 0.05		0.47 ± 0.04	-
³⁸ K 7.64m						
⁴² K 12.36h	0.66 ± 0.10		0.83 ± 0.06		0.95 ± 0.05	
⁴³ K 22.30h	0.81 ± 0.10	-	0.77 ± 0.05		0.85 ± 0.03	
⁴⁴ K 22.13m						
⁴⁵ K 17.30m						
⁴⁷ Ca 4.54d	0.59 ± 0.16		0.56 ± 0.17	M	0.73 ± 0.12	
⁴³ Sc 3.89h	0.40 ± 0.07	-	1.01 ± 0.14		1.28 ± 0.28	-
⁴⁴ Sc 3.93h	0.89 ± 0.07		1.06 ± 0.06		0.88 ± 0.05	
^{m44} Sc 58.60h	0.95 ± 0.12		1.20 ± 0.09		2.13 ± 0.12	
⁴⁶ Sc 83.79d	0.81 ± 0.07		0.86 ± 0.07		0.93 ± 0.08	
⁴⁷ Sc 80.28h	1.09 ± 0.14		1.17 ± 0.10	-	0.87 ± 0.07	
⁴⁸ Sc 43.67h	1.39 ± 0.16		1.47 ± 0.10		1.10 ± 0.04	
⁴⁶ V 15.97d	1.16 ± 0.08		1.45 ± 0.06		1.11 ± 0.07	
⁴⁸ Cr 21.56h	0.92 ± 0.14		0.97 ± 0.07			
⁴⁹ Cr 42.30m	1.00 ± 0.22	M	1.24 ± 0.12	-		
⁵¹ Cr 27.70d	1.06 ± 0.13		1.15 ± 0.12		0.64 ± 0.24	M
⁵² Mn 5.59d	0.68 ± 0.05		1.15 ± 0.04			
^{m52} Mn 21.10m	1.68 ± 0.35		1.24 ± 0.09			
⁵⁴ Mn 312.12d	1.13 ± 0.12		1.01 ± 0.10			
⁵⁶ Mn 2.58h	0.81 ± 0.06		0.99 ± 0.05			
⁵² Fe 8.28h			1.09 ± 0.13			
⁵³ Fe 8.51m						
⁵⁹ Fe 44.50d	0.82 ± 0.09		0.76 ± 0.04			
⁵⁵ Co 17.53h	0.66 ± 0.09		1.13 ± 0.10			
⁵⁶ Co 77.27d	1.04 ± 0.08		1.15 ± 0.10			
			1.79 ± 0.15			
⁵⁷ Co 271.79d	0.85 ± 0.09		0.38 ± 0.09	M		
⁵⁸ Co 70.82d	0.91 ± 0.09		0.31 ± 0.08	M		
⁶⁰ Co 5.27y	0.90 ± 0.08					
⁶¹ Co 99.00m	0.68 ± 0.08					
⁶² Co 90.00s						
⁵⁷ Ni 35.60h	0.76 ± 0.11			1.44 ± 0.07	Ni	
⁶⁰ Ni 2.52h	1.46 ± 0.29					
⁶⁰ Cu 23.70m	0.78 ± 0.08					
⁶¹ Cu 3.33h	0.87 ± 0.25					
⁶⁴ Cu 12.70h	0.63 ± 0.10					
⁶² Zn 9.19h	1.05 ± 0.23					
⁶³ Zn 38.47m						
⁶⁵ Zn 244.26d	0.62 ± 0.08					
	0.97 ± 0.20					

R = Ratio FLUKA/Exp

0.8 < R < 1.2

0.8 < R ± Error < 1.2

Exp/MDA < 1


R + Error < 0.8 or
R - Error > 1.2

Reference:

M. Brugger, S. Roesler et al., Nuclear Instruments and Methods A 562 (2006) 814-818

Benchmark experiment – *Results 1*


Dose rate as function of cooling time
for different distances between sample and detector

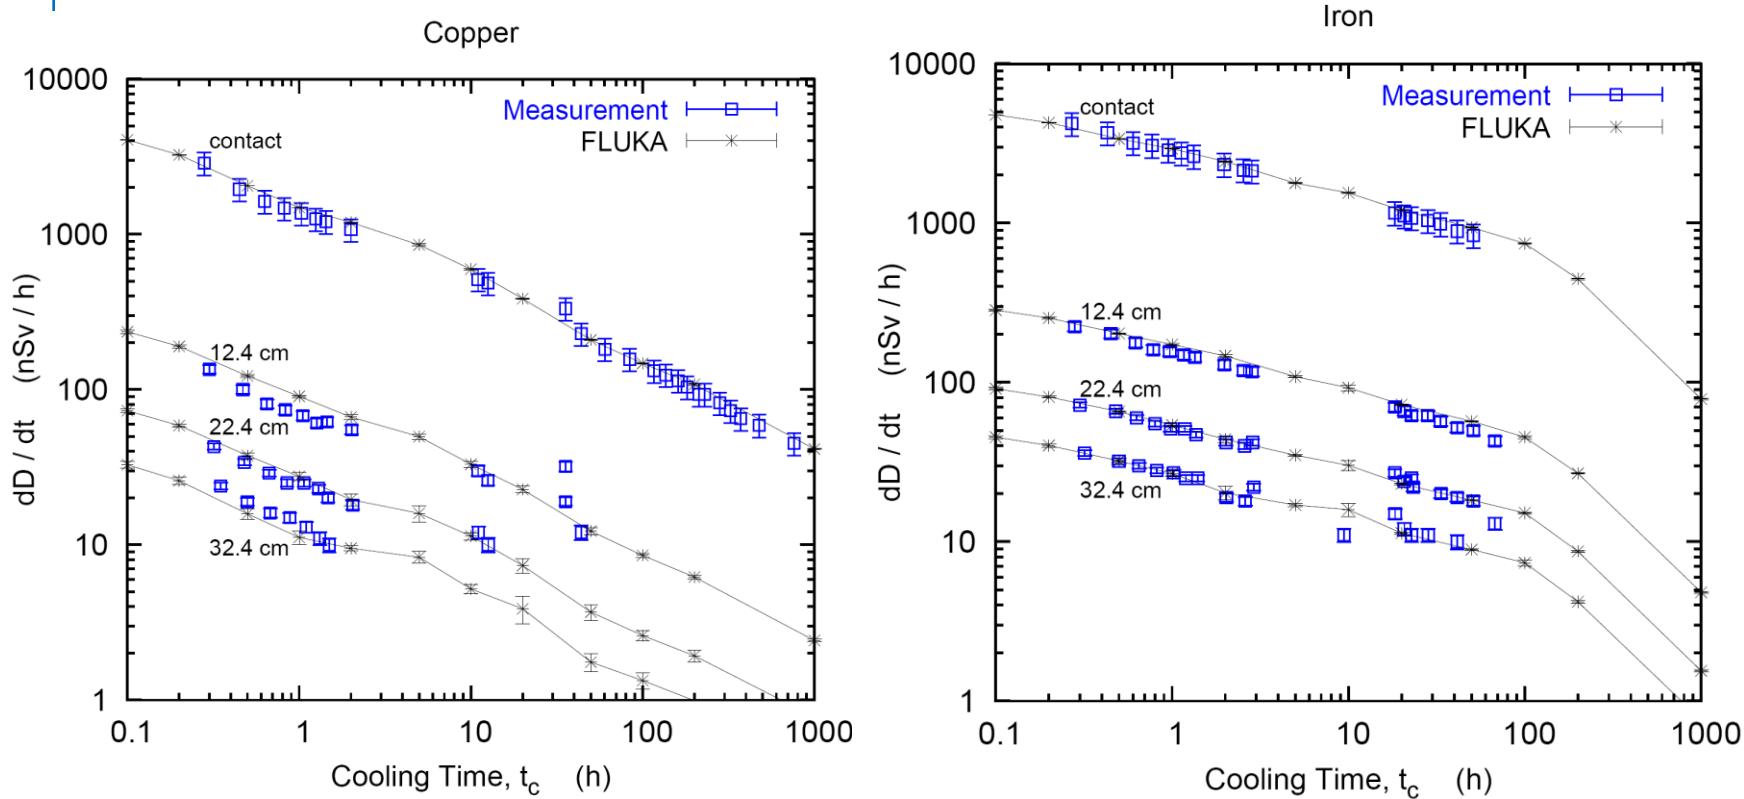

Reference: M. Brugger, S. Roesler *et al.*, Radiat. Prot. Dosim. 116 (2005) 12-15

Benchmark experiment – *Results 2*


Dose rate as function of cooling time
for different distances between sample and detector

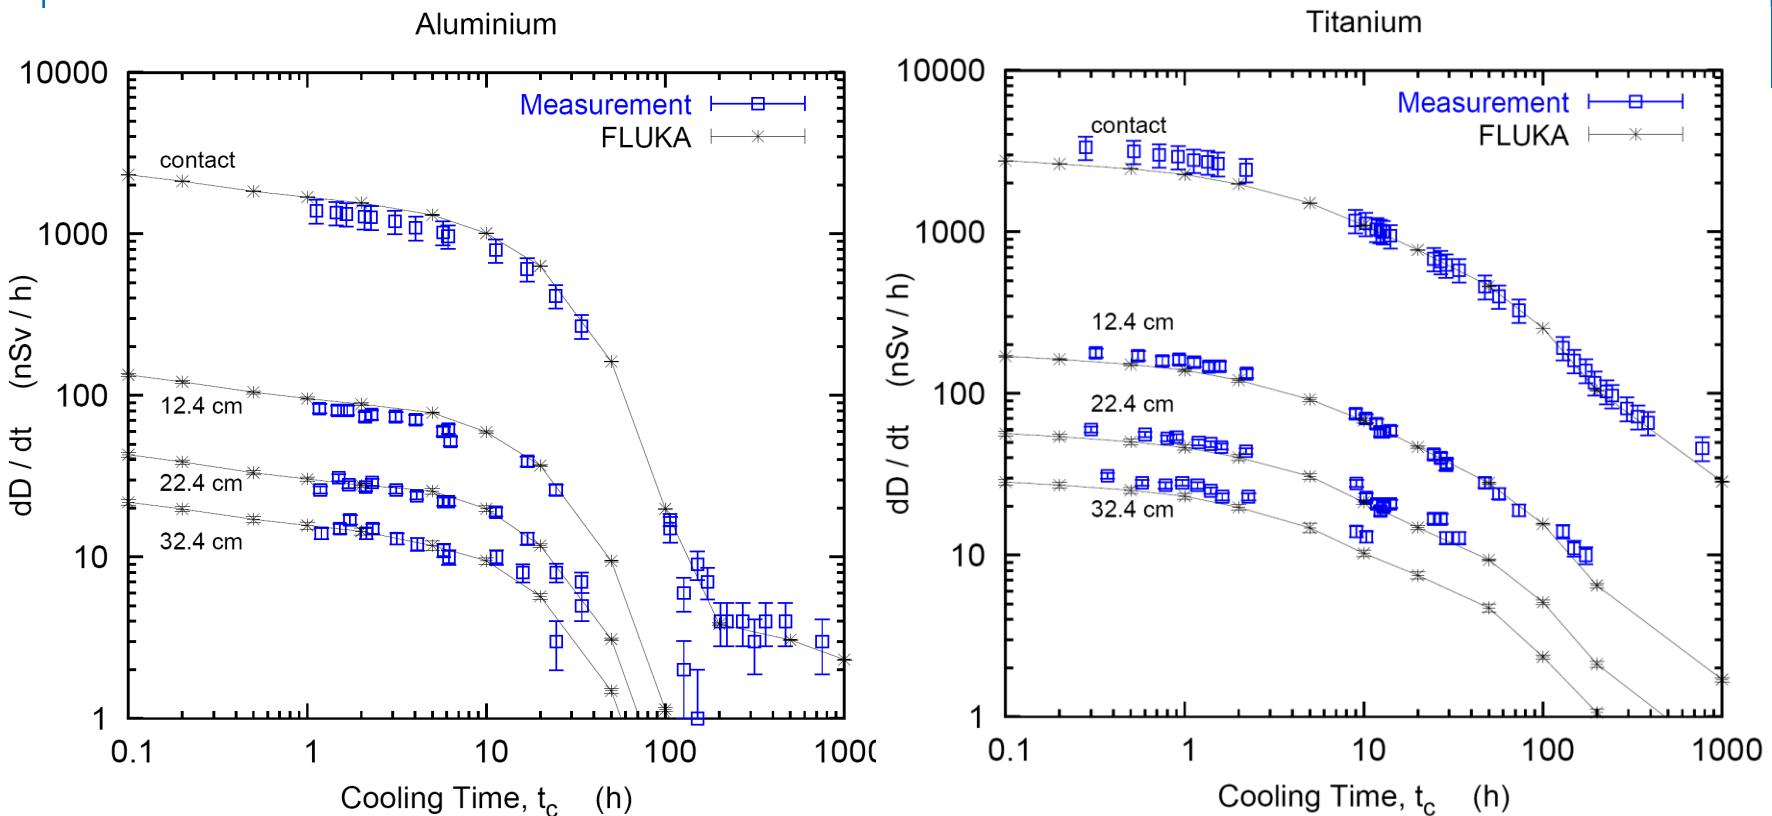

Reference: M. Brugger, S. Roesler *et al.*, Radiat. Prot. Dosim. 116 (2005) 12-15

Benchmark experiment – *Results 3*

Dose rate as function of cooling time
for different distances between sample and detector


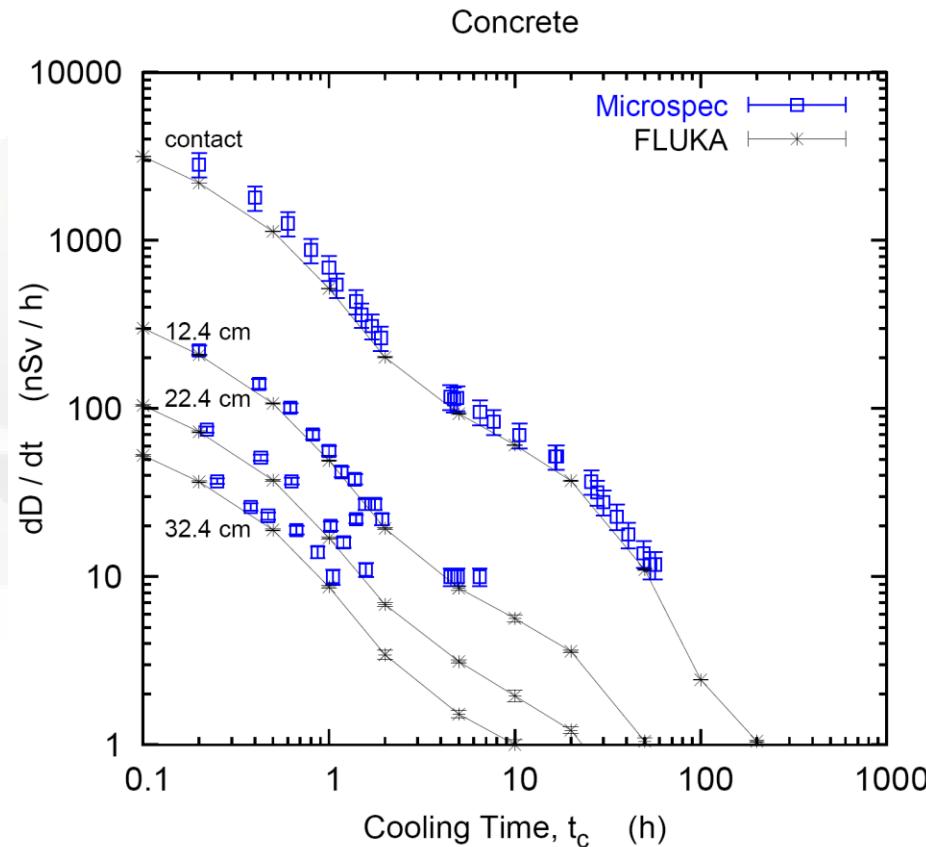


Reference: M. Brugger, S. Roesler *et al.*, Radiat. Prot. Dosim. 116 (2005) 12-15

Benchmark experiment


$t_{cool} < 2$ hours :

beta emitter
(^{11}C , $t_{1/2} = 20.38\text{min}$)

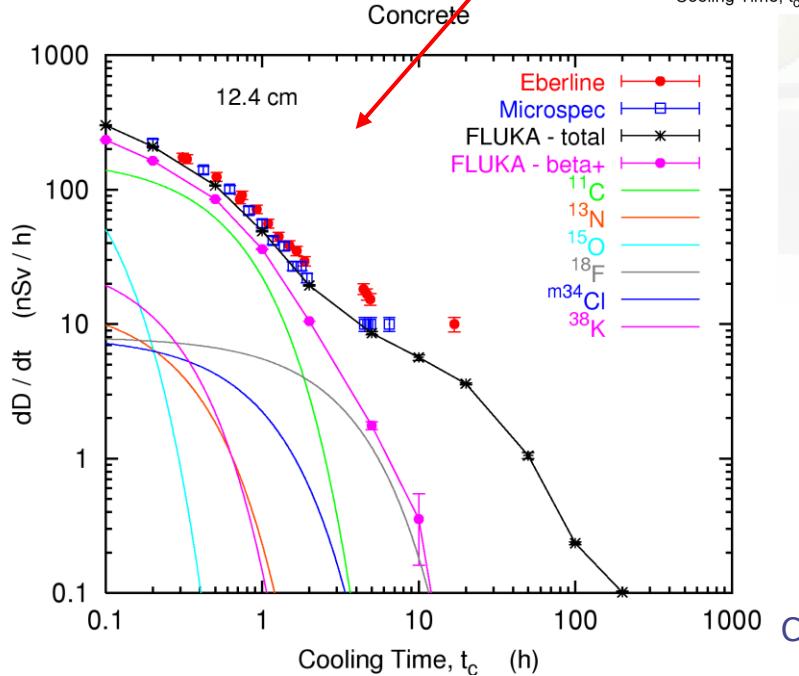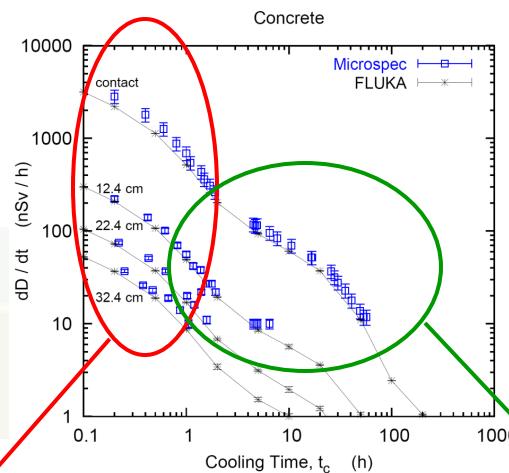

$2 \text{ hours} < t_{cool} < 1 \text{ day} :$


gamma emitter
(^{24}Na , $t_{1/2} = 14.96\text{hrs}$)

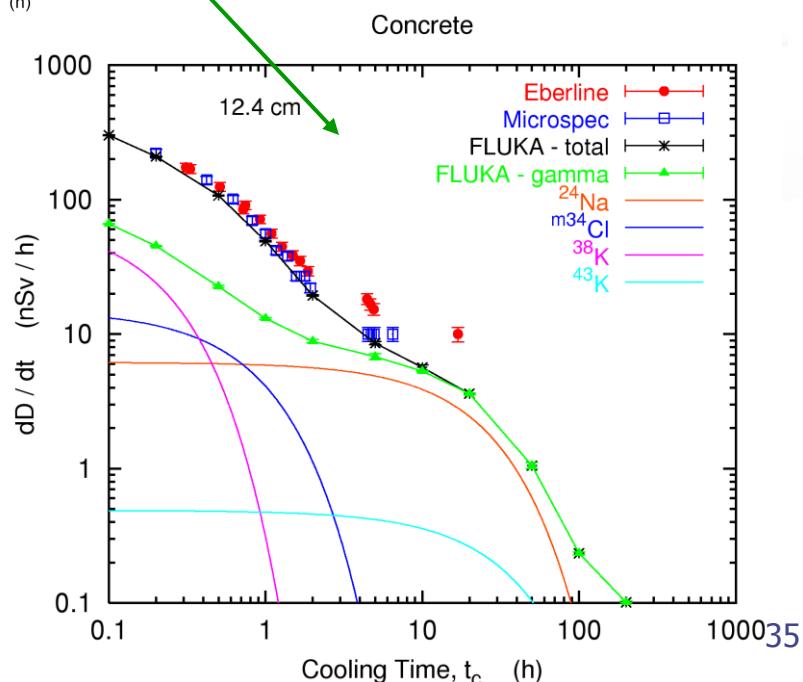



Applications

Applications – *LHC collimation region*

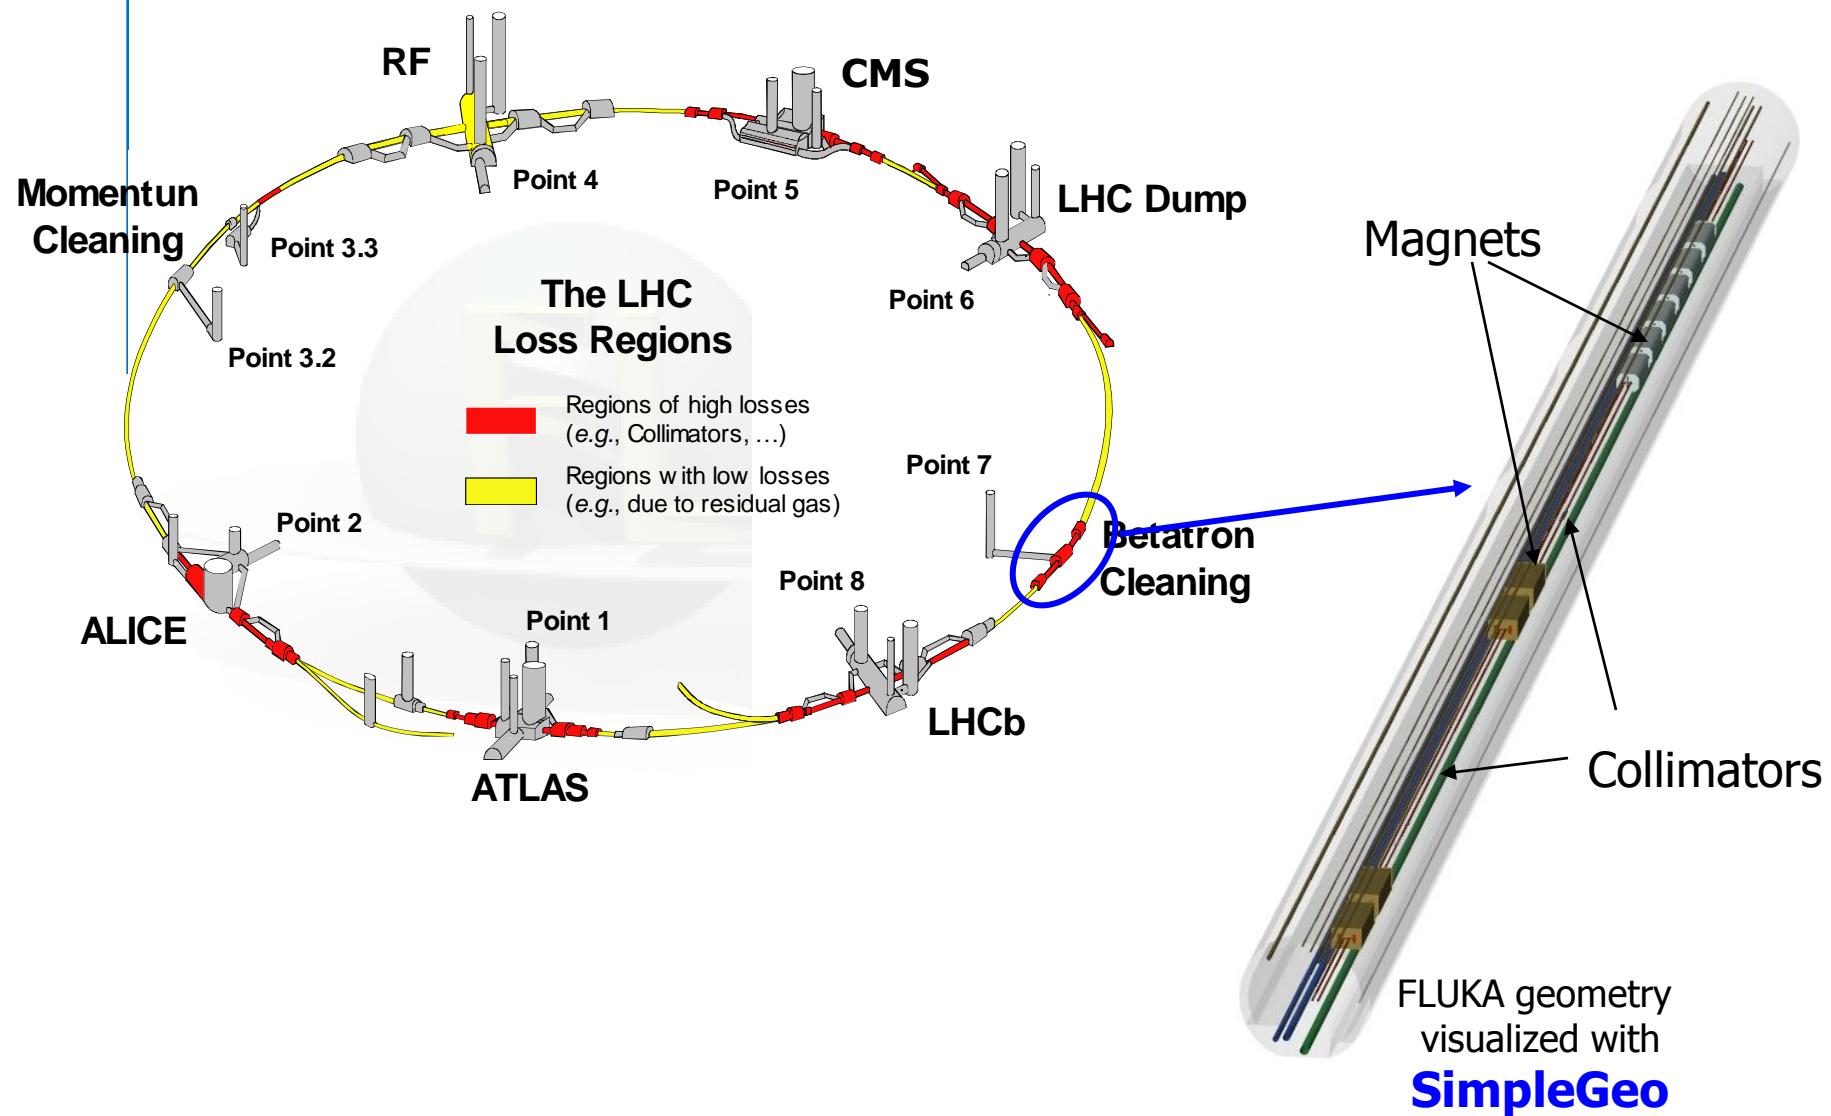


Applications – LHC collimation region

Cooling time



8 hours

1 week

4 months

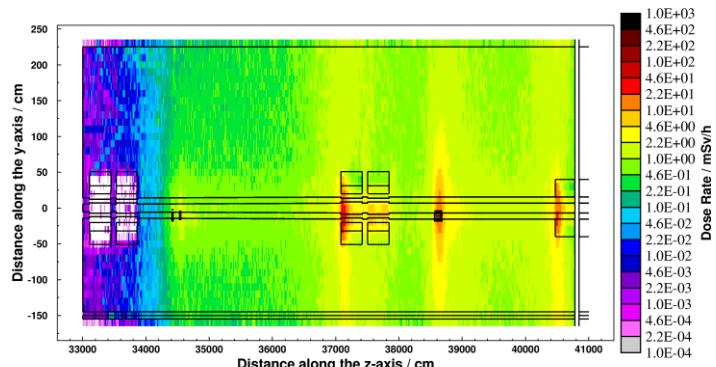

Residual dose rate (mSv/h)
after one year of operation

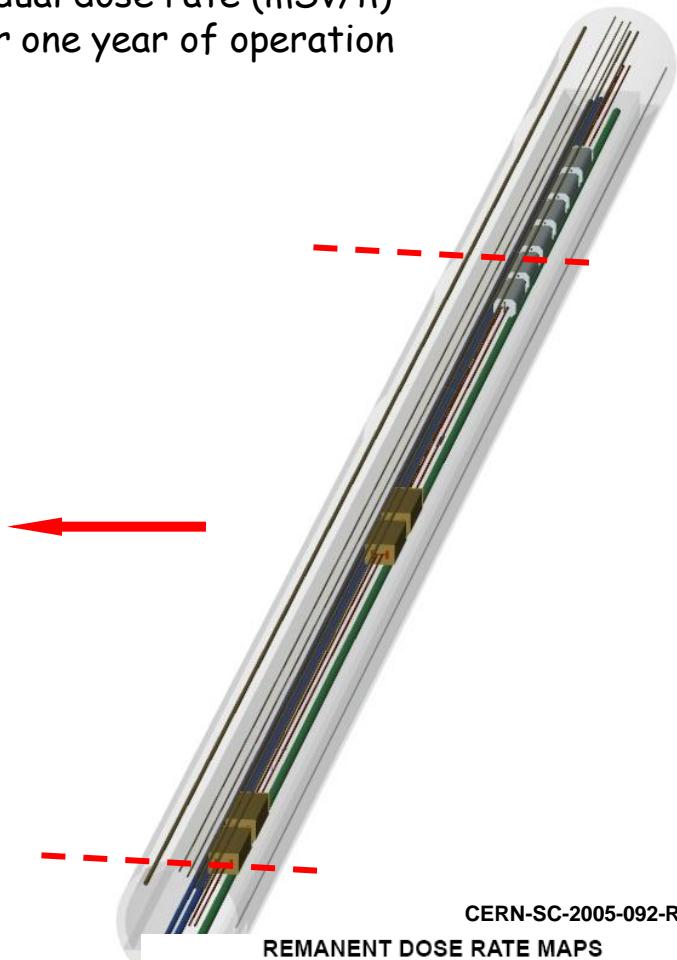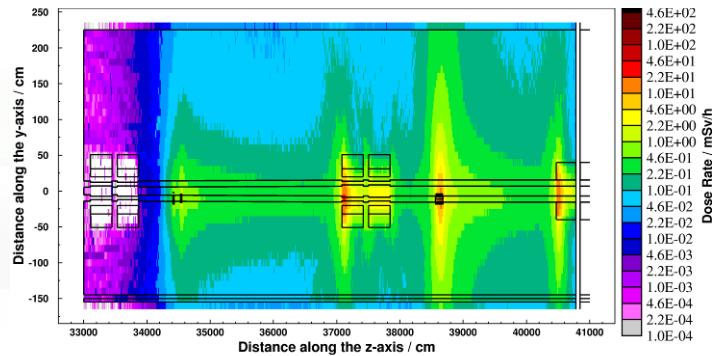

CERN-SC-2005-092-RP-TN
REMANENT DOSE RATE MAPS
OF THE LHC BETATRON CLEANING INSERTION (IR7)

M. Brugger, D. Forkel-Wirth, S. Roesler




Applications – LHC collimation region

Cooling time


8 hours

1 week

4 months

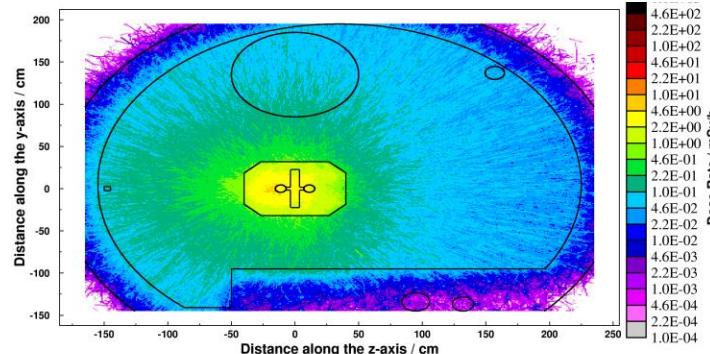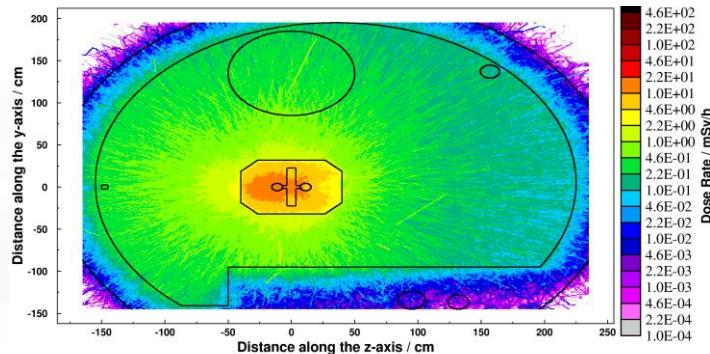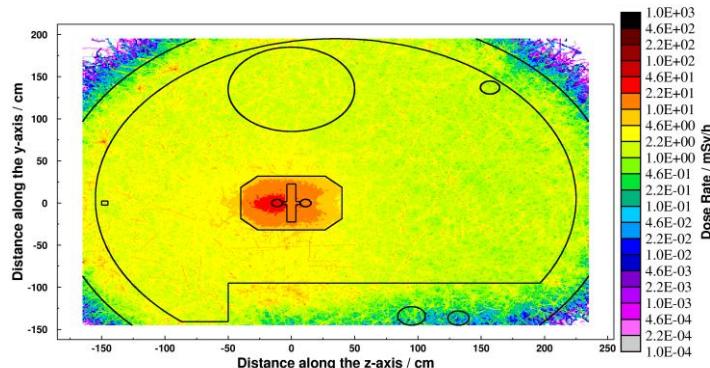

Residual dose rate (mSv/h)
after one year of operation


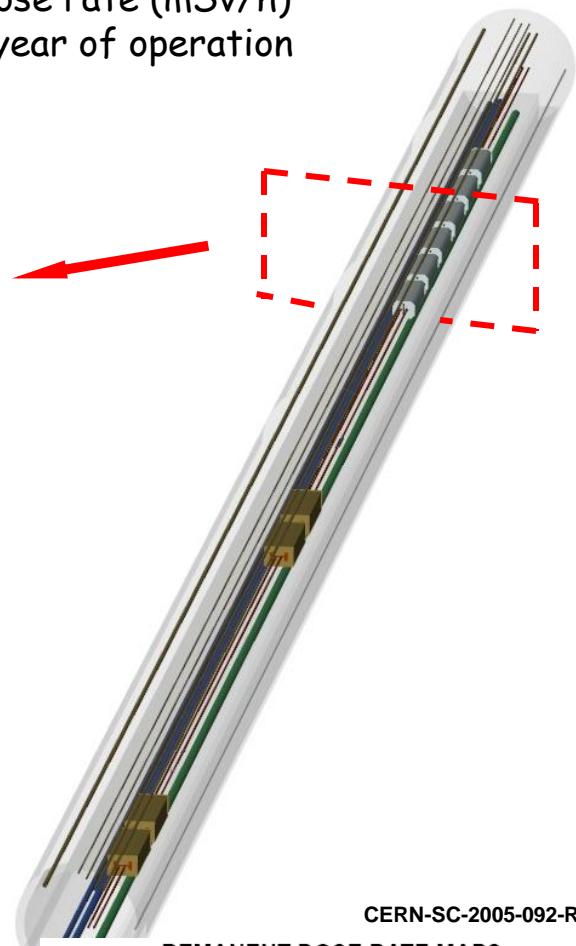


CERN-SC-2005-092-RP-TN
REMANENT DOSE RATE MAPS
OF THE LHC BETATRON CLEANING INSERTION (IR7)



M. Brugger, D. Forkel-Wirth, S. Roesler

Applications – CNGS

CERN NEUTRINOS TO GRAN SASSO Underground structures at CERN

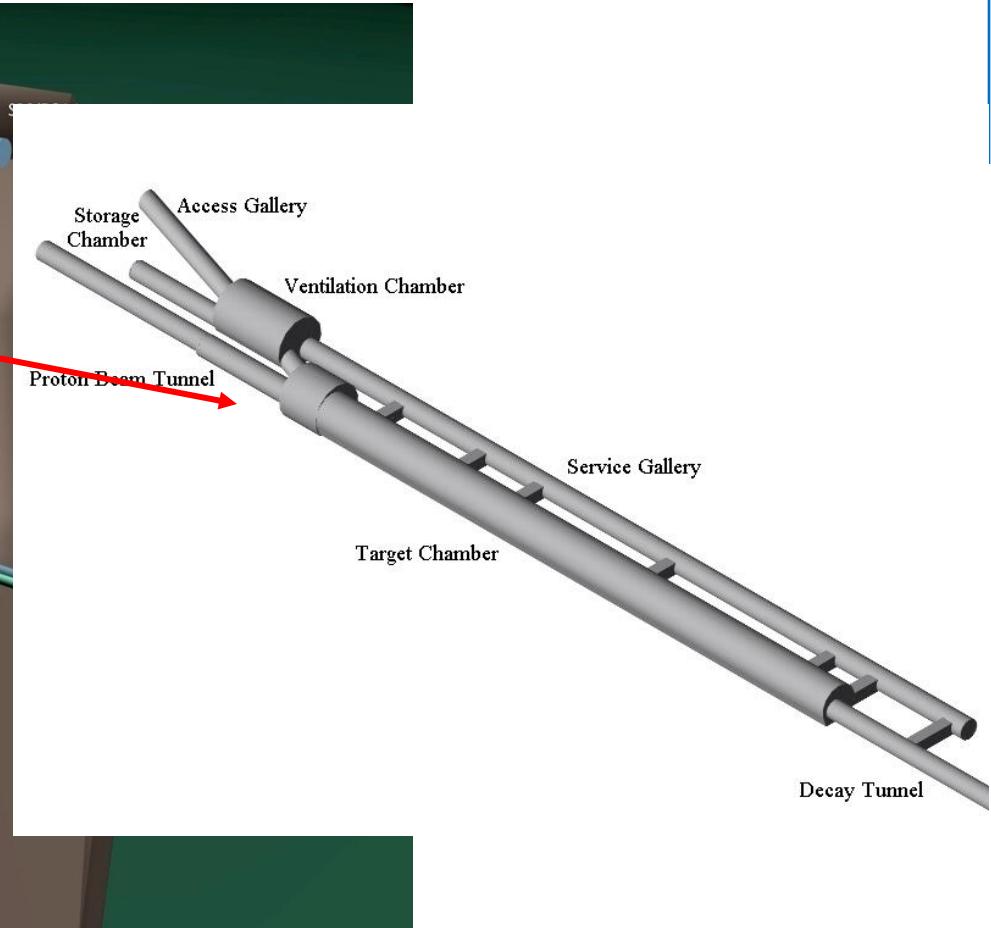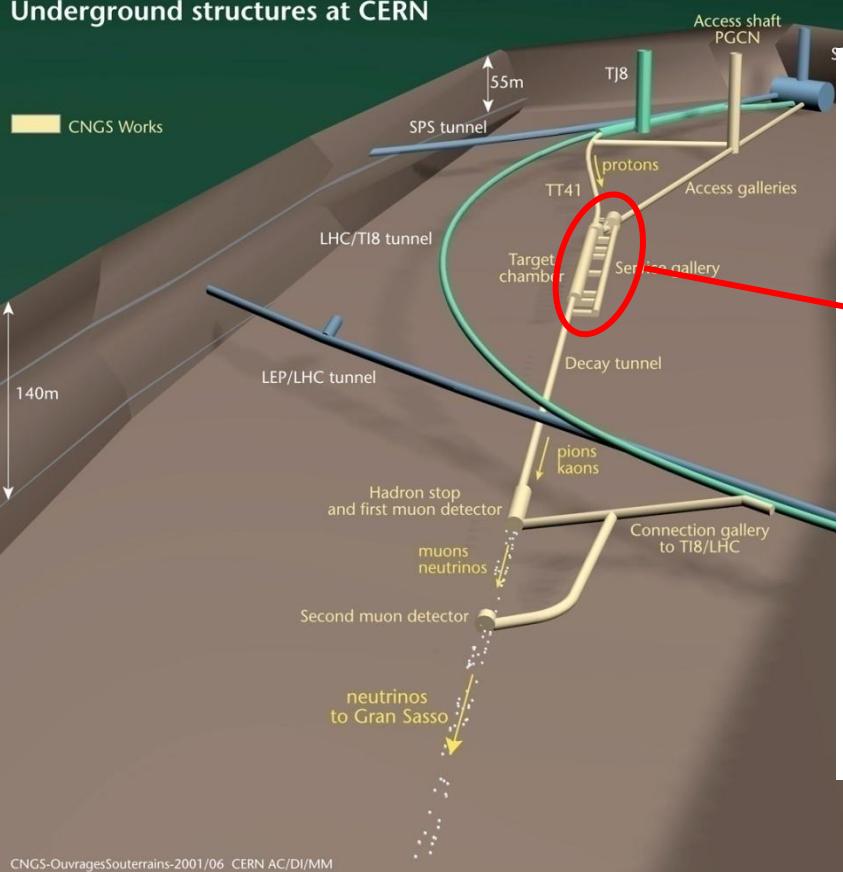

Applications – CNGS

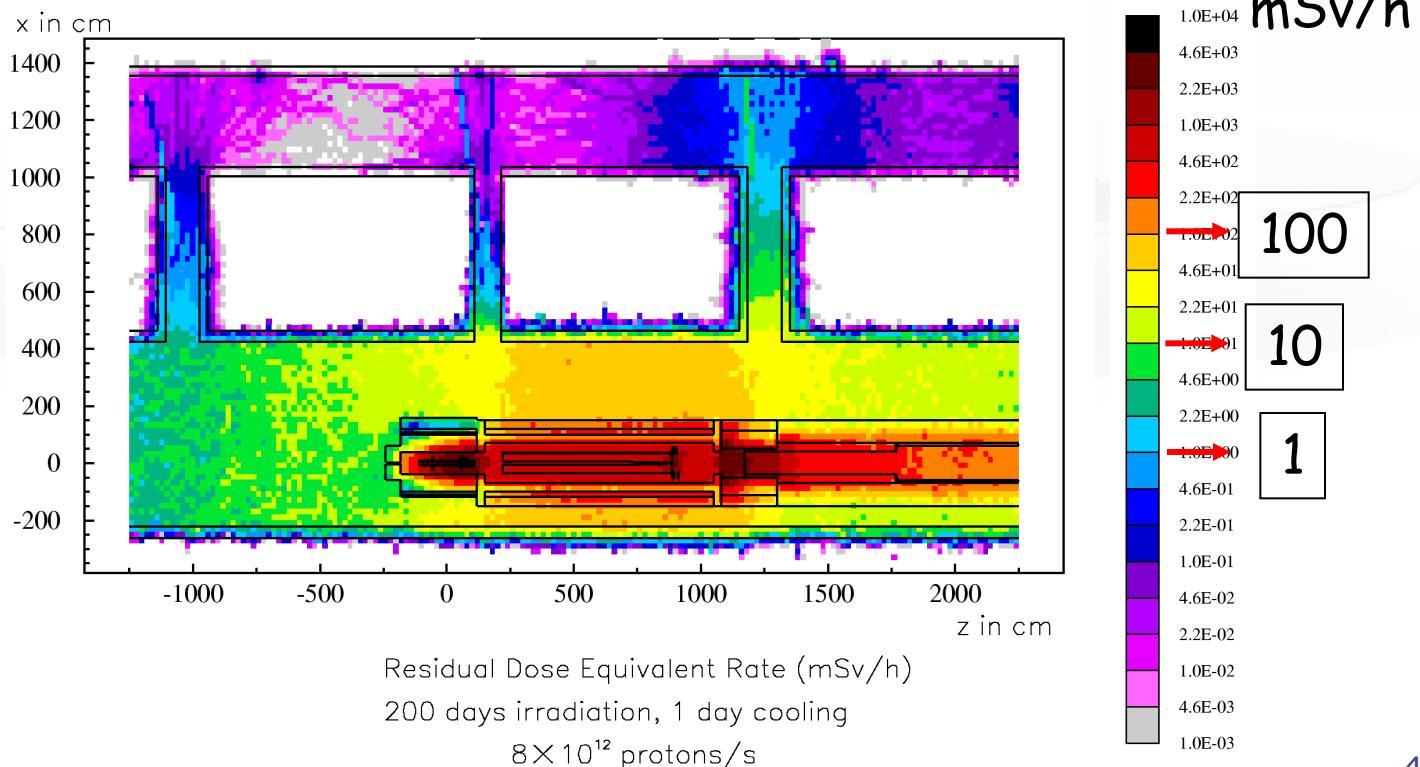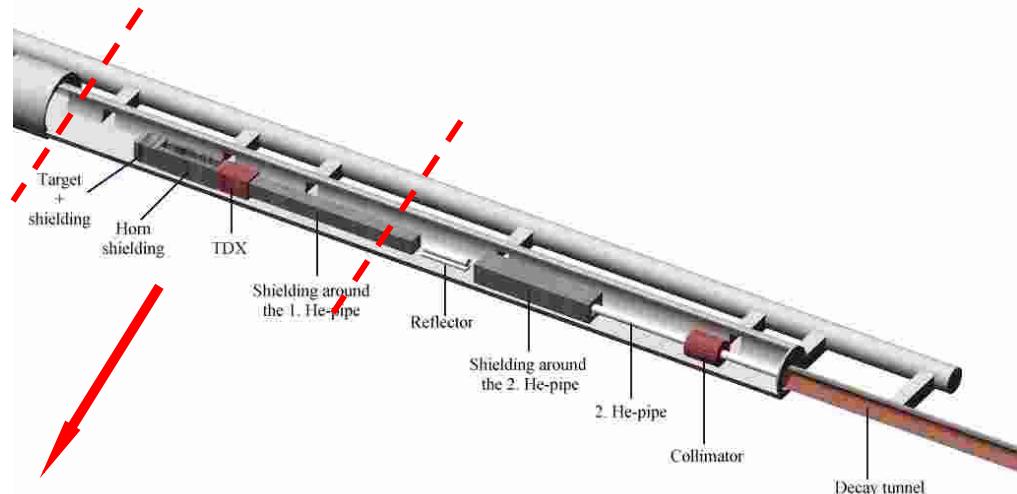

Applications – CNGS

